



# inSTYLE



Home Page

Products

Dealers

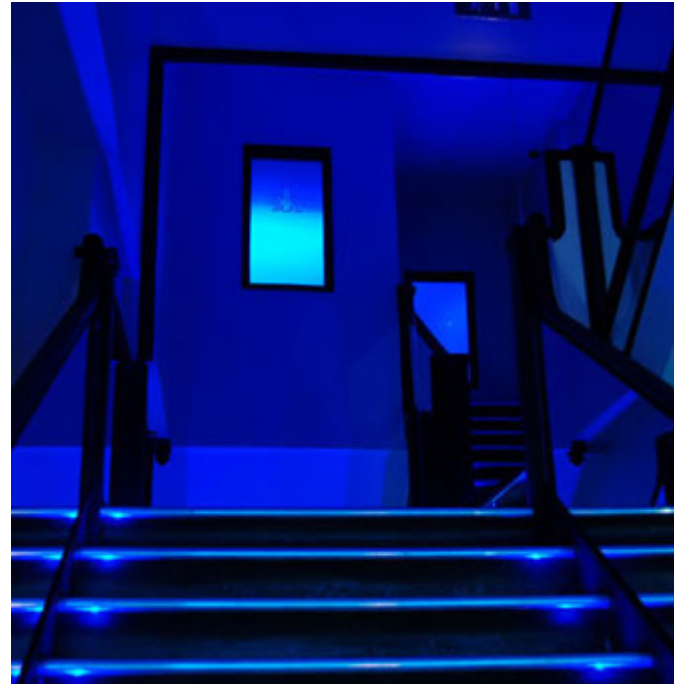


## INL - 9 RGB 350mm

The Instyle Hi Lux Linear consists of 9 high powered 1 watt [Cree](#) X lamp 7090 LEDs


[Cree](#) LEDs lead the industry in brightness and efficiency for solid state lighting applications. Stylish precision extruded aluminium with defusion cover gives superb colour mix at short and medium distances. An ideal solution for medium throw high saturation applications.

### DIMENSIONS

Length:

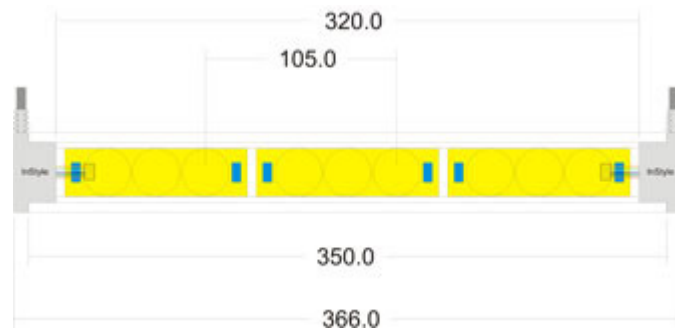

Depth:  
Height:

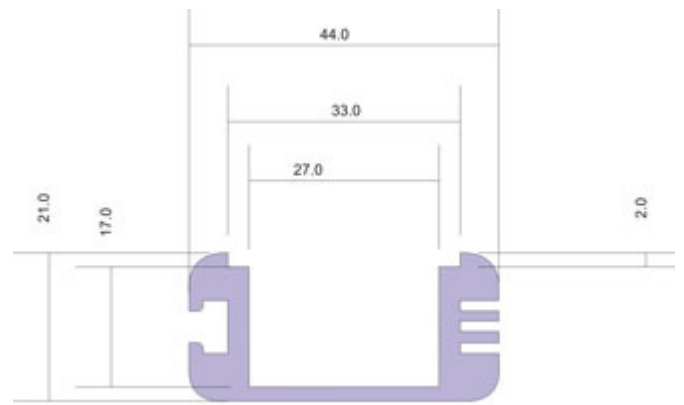

CONSTRUCTION:  
INSTALLATION METHOD:  
FLAMMABILITY:

Silver anodised aluminium  
Stainless Steel Adjustable Brackets  
94v-0 flame class rating

TECHNICAL SPECIFICATION.

NO. LEDS	9
INPUT VOLTAGE:	48 VOLTS DC
MAXIMUM POWER CONSUMPTION:	10.8 WATTS
POWER/ DATA CONNECTION:	RJ45 8 WAY
POWER SUPPLY:	IND36 Colour Driver
OPERATING AMBIENT TEMPERATURE RANGE:	-20c/+40c
OPERATING TEMPERATURE:	+50c @ ambient 25c
COOLING SYSTEM:	conductive cooling system
TYPICAL LUMEN MAINTENANCE:	70% @ 50,000 hours
LED LIFE EXPECTANCY:	minimum 50,000 hours

32 Main Street, Willoughby Waterleys, Leicester, England, LE8 6UF  
Tel: +44 (0)116 2799083 Email: [info@instyleuk.net](mailto:info@instyleuk.net)