## inSTYLE




















**INH - 9 RGB 300mm** 


The Instyle Medium Lux Linear consists of 9 medium powered <u>Cree</u> LEDs. Stylish Precision Extrude Aluminium with Defusion cover gives superb colour mix at short and medium distances. An ideal solution for short throw high satuation applications i.e. sofits, covings, back bars.

## **DIMENSIONS**

Length:

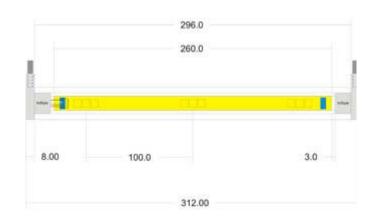

Depth: Height:

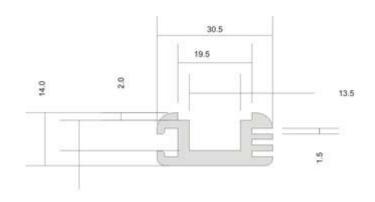

CONSTRUCTION:
INSTALLATION METHOD:
FLAMMABILITY:

Silver anodised aluminium
Stainless Steel Adjustable Brackets
94v-0 flame class rating

TECHNICAL SPECIFICATION.

NO. LEDS

**INPUT VOLTAGE:** 

MAXIMUM POWER CONSUMPTION:

POWER/ DATA CONNECTION:

POWER SUPPLY:

OPERATING AMBIENT TEMPERATURE RANGE:

**OPERATING TEMPERATURE:** 

COOLING SYSTEM:

TYPICAL LUMEN MAINTENANCE:

LED LIFE EXPECTANCY:

9

48 VOLTS DC

3.6 WATTS

**RJ45 8 WAY** 

IND36 Colour Driver

-20c/+40c

+50c @ ambient 25c

conductive cooling system

70% @ 50,000 hours

minimum 50,000 hours

32 Main Street, Willoughby Waterleys, Leicester, England, LE8 6UF Tel: +44 (0)116 2799083 Email: info@instyleuk.net